

Zip InLine ES[®]

Instantaneous hand wash packs - complete with heater, tap & fittings

Instantaneous hot water.



Non-convulsive tap (NC) pack



Mixer tap (MT) pack



Mixer tap



Non-convulsive tap

InLine ES[®] features

- The Zip InLine ES[®] heater is designed to provide hot water for handwashing in areas where space is limited.
- Heating power controlled electronically for temperature stabilisation.
- Outlet temperature can be preset inside the unit between 30°C and 43°C (factory set at 38°C).
- Flow adjustment control, preset for a temperature increase of 25°C.
- Stainless steel bare-wire heating system for very quick response.
- Double pole thermal cut-out protection.
- Supplied with 700mm of pre-wired cable.
- Easy to install with wall bracket.

Non-convulsive (NC) kit

- Provides instantaneous hot water using the Zip InLine ES[®] heater.
- Includes non-convulsive single outlet tap and plumbing fittings (isolation valve not included).
- Can be purchased in 3 power rating options.
- Includes 500mm braided hoses for connecting the Zip InLine ES[®] heater to the cold water supply and tap.
- Optional matching cold tap available (ZL018).

Mixer tap (MT) kit

- Provides instantaneous hot water using the Zip InLine ES[®] heater.
- Includes single lever mixer tap complete with braided hoses and plumbing fittings (isolation valve not included).
- Can be purchased in 3 power rating options.
- Includes 500mm braided hose for connecting the Zip InLine ES[®] heater to the cold water supply.

Zip InLine ES®

Instantaneous hand wash packs - complete with heater, tap & fittings

Product code	Tap type	Power rating kW@230V	Maximum flow rate* Litres/min.
ES3/NC	Non-concussive	2.8	1.5
ES4/NC	Non-concussive	4.4	2.4
ES6/NC	Non-concussive	5.5	3.0
ES3/MT	Single lever mixer	2.8	1.5
ES4/MT	Single lever mixer	4.4	2.4
ES6/MT	Single lever mixer	5.5	3.0

* Factory set 38°C flow rate, at incoming water temperature of 12°C, 3 bar dynamic pressure and 230V electrical power supply.

Components

InLine ES® hand wash packs include all plumbing fittings necessary for installation (excluding isolation valves and rigid pipe).

Installation

The tap must be positioned so that it drains into a suitable sink. The InLine ES® instantaneous water heater should be installed in a frost free area, with its base level (read water heater and tap instructions before commencing installation).

Electrical

Installation must comply with current IEE regulations. To be wired to a double pole 13A fused spur.

Plumbing

Must be installed in accordance with UK Water Supply Regulations.
Designed for direct connection to a potable (drinkable) cold water supply with a minimum water pressure of 2 bar and a maximum water pressure of 10 bar.
An isolating valve (not supplied) should be installed between the incoming cold water supply and the ES hand wash pack.

Approvals

WRAS approved, CE endorsed.


Technical Support

Contact Zip on:
Tel: 0845 6 005 005 / 0345 6 005 005
e-mail: service@zipheaters.co.uk

Warranty

Appliance warranty
12 months.
See website for details.

Mixer tap

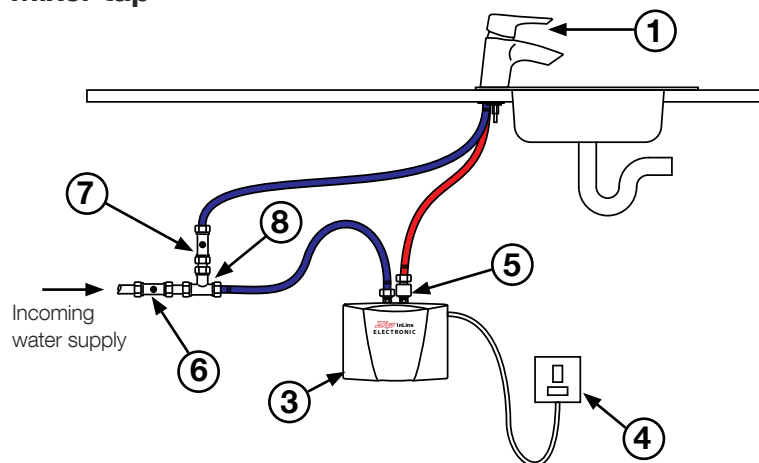

Components

- ① Single lever mixer tap.
- ② Non concussive tap.
- ③ InLine ES® instantaneous water heater.
- ④ Fused spur.
- ⑤ Non-return valve.
- ⑥ Isolation valve (not supplied).
- ⑦ Flow adjuster.
- ⑧ T-piece.

Non-concussive tap

